


ANKER

Versions:


Anker galvanised | Anker powder coated | floor fastening

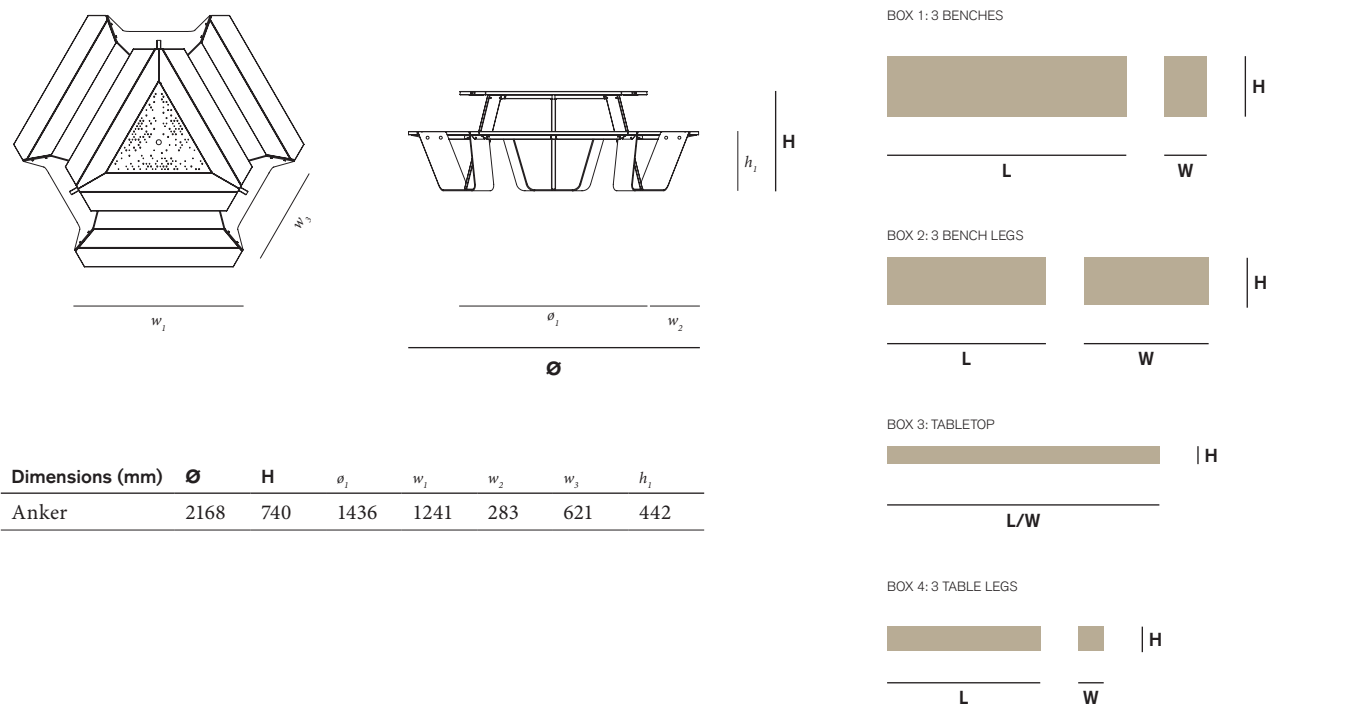

Dimensions (mm)	Ø	H	ø ₁	w ₁	w ₂	w ₃	h ₁
Anker	2168	740	1436	1241	283	621	442



Box dimensions (mm)		L	W	H	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Anker galvanised	Box 1	1265	225	320	1	0,09	25,00	23,40	2,60
	Box 2	840	660	250	1	0,14	55,00	52,50	2,50
	Box 3	1440	1280	95	1	0,18	28,00	23,50	4,50
	Box 4	810	135	130	1	0,01	9,00	8,60	0,40
	total:				0,42		117,00	108,00	10,00
Anker powder coated	Box 1	1265	225	320	1	0,09	25,00	23,40	2,60
	Box 2	810	135	130	1	0,14	55,00	52,50	2,50
	Box 3	1440	1280	95	1	0,18	28,00	23,50	4,50
	Box 4	840	660	250	1	0,01	9,00	8,60	0,40
	total:				0,42		117,00	108,00	10,00

ANKER WITH INUMBRINA

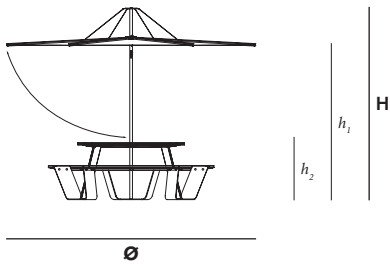


Dimensions (mm)	Ø	H	h ₁	h ₂
Inumbrina ø32 with Anker	3200	2506	2009	844

RECOMMENDED INSTALLATION

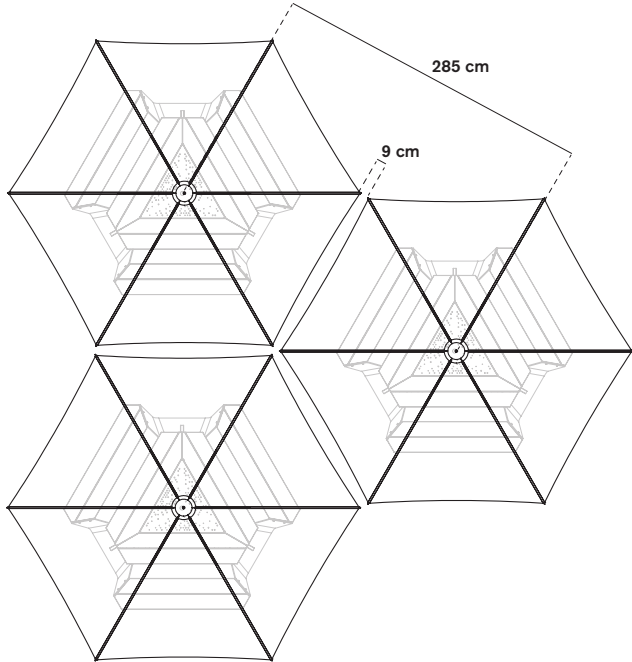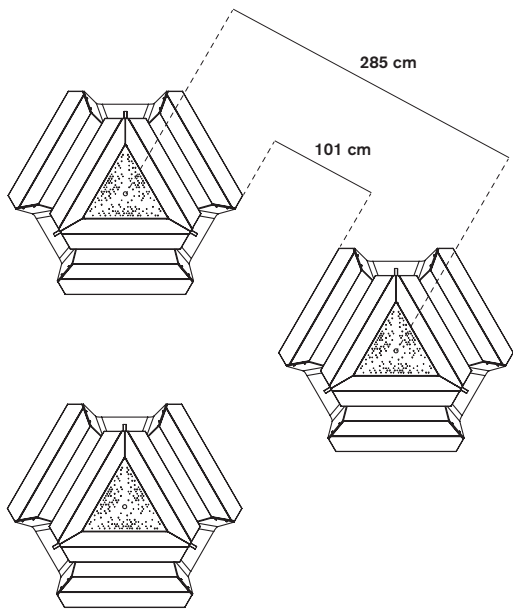

OPTIONAL FLOOR FASTENING

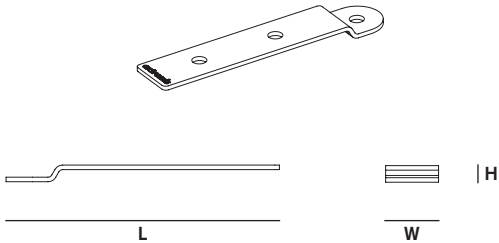

Dimensions (mm)	L	W	H
Floor fastening	181	35	11

BOX 5: FLOOR FASTENING



Box dimensions (mm)		L	W	H	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Floor fastening	Box 5	200	140	140	1	0,01	1,27	1,20	0,07


LEGS



Galvanised steel



Earth



White
(ral 9003)



Black brown
(ral 8022)

TABLETOP & BENCH



Iroko hardwood




H.O.T.wood

FRAME



Galvanised steel



Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV colour fastness	Flame retarding
		mm	micron					
Powder coated steel legs	<ul style="list-style-type: none">• a technique of applying dry paint to a part• electrostatically charged and sprayed onto the object	8	60	7,50 10³kg/m³	outdoor & indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN 13501-1 A2-s1 **
Galvanised steel legs	<ul style="list-style-type: none">• most durable method for protecting metal from rusting• protective layer• very long life span• can perfectly be recycled	8	50 - 100	7,50 10³kg/m³	outdoor & indoor	n.a.	very good, galvanisation will however become dull when used outdoors	NEN-EN13501-1 A1 *
Iroko tabletop & benches	<ul style="list-style-type: none">• few maintenance	25	n.a.	600 - 700 kg/m³	outdoor & indoor	n.a.	untreated wood turns grey after a while	/
H.O.T. wood tabletop & bench	<ul style="list-style-type: none">• very ecological• made from European ash• very stable• needs few maintenance• carries the PEFC™ label for durable forestry	25	n.a.	600 kg/m³	outdoor & indoor	n.a.	untreated wood turns grey after a while	/
								
Galvanised steel frame	<ul style="list-style-type: none">• most durable method for protecting metal from rusting• protective layer• very long life span• can perfectly be recycled	3	50 - 100	7,50 10³kg/m³	outdoor & indoor	n.a.	very good, galvanisation will however become dull when used outdoors	NEN-EN13501-1 A1 *
ZnAlMg-coated steel tabletop	<ul style="list-style-type: none">• a technique of applying dry paint to a part• electrostatically charged and sprayed onto the object	1,50	60	7,50 10³kg/m³	outdoor & indoor	n.a.	very good: colour can fade a little bit when exposed to UV	NEN-EN 13501-1 A2-s1 **

* NEN-EN13501-1 A1

** NEN-EN 13501-1 A2-s1

Class A1 products will not contribute in any stage of the fire including the fully developed fire. For that reason they are assumed to be capable of satisfying automatically all requirements of all lower classes.

Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will not significantly contribute to the fire load and fire growth.

APPLICATIONS

Private: on terraces, patios, ...

Public: hotel and catering industry, company terraces, public spaces, ...

GOOD TO KNOW

1. PEFC[®] certified wood originates from sustainably managed forests.
2. The hole in the tabletop to place an umbrella is Ø37 mm
3. Anker combines perfectly with Inumbrina ø32.



FLOOR FASTENING

Anker can be fixed to the floor with our anchoring set (to be ordered separately): three jugged steel plates to be fixed with bolts. Use suitable bolts or screws from a DIY store depending on the material your terrace is made of: and combine them with this three-part floor-fastening set.

F.A.Q.

Q: Do you need to oil the wood?

A: Only if you want to maintain the original dark colour of the wood. If you don't treat it with oil, the wood will turn grey.

MAINTENANCE

Download the manuals from our website for maintenance instructions.